



City of Tracy
333 Civic Center Plaza
Tracy, CA 95376

PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

MAIN 209.831.6400
FAX 209.831.6439
www.cityoftracy.org

March 2, 2026

Plan Holders of: **Headworks Bar Screen 1 Replacement, Project CIP 74170**

Subject: Addendum No. 3

Attached is Addendum No. 3 for the above-referenced project.

If you have any questions regarding this addendum, please contact Padmanjali Vanka at Padmanjali.Vanka@cityoftracy.org via email.

Sincerely,

Padmanjali Vanka

Junior Engineer

Attachments:

1. Vertical Mounting Drawing.
2. Local Hire Good Faith Effort form.
3. Revised Bid Schedule

cc: Project File

ADDENDUM NO. 3

March 2, 2026

Plan Holders of: **Headworks Bar Screen 1 Replacement Project, CIP 74170.**

All prospective bidders are hereby notified that modifications and/or changes are to be made to the project's documents for this project, as entitled above.

The following items indicate additions and/or deletions to the above-referenced project's documents and are hereby made a part thereof and are subject to all applicable requirements thereunder as if originally shown and/or specified. This addendum modifies the Bidding Documents and is hereby made part of the Contract Documents for this project to the extent as though it was originally included therein.

This addendum shall be acknowledged either by 1) acknowledging on the Signature of Bidder page of the Bid Proposal or 2) signing the last page of this addendum and submitting it with the bid. Any proposal received that does not comply with this requirement may be rejected.

The documents of this project are hereby changed as follows:


All prospective bidders are hereby notified that the following items indicate answers to questions submitted by the bidders.

Item No. 1: Volume 3, Drawings, Sheet 41-E-110

Question: Sheet 08-N-005 shows PLC-5 is existing, but sheet 41-E-110 shows the PLC-05 in "bold", indicating it is new. Please confirm PLC-5 is existing, not new?

Answer: PLC-5 shown on MCC-HDW ONE-LINE DIAGRAM (PARTIAL) is existing.

MCC-HDW ONE-LINE DIAGRAM (PARTIAL) have been modified as shown in the following.

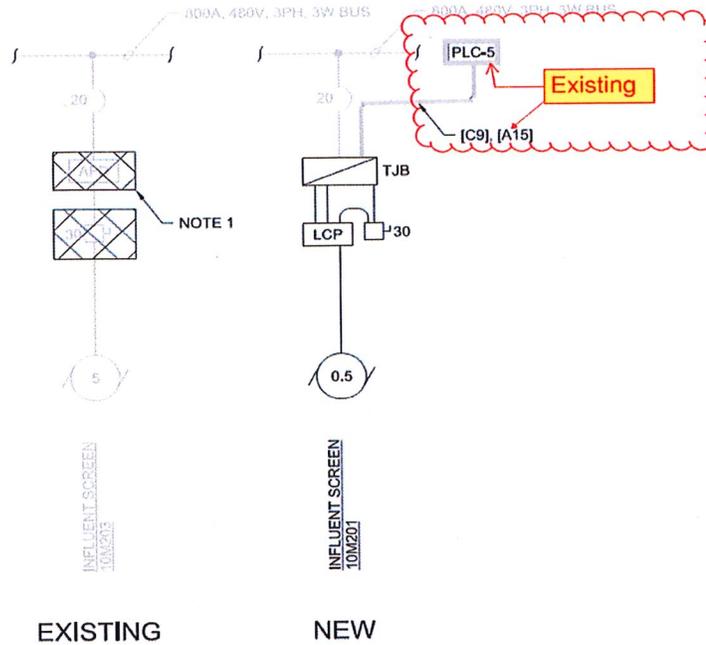

MCC-HDW ONE-LINE DIAGRAM (PARTIAL)

Item No. 2:

Question: Sheet 41-E-110 MCC-HDW One-line Diagram (partial): Please confirm the conduits for circuits [C9] and [A15] shown to run from the TJB to PLC-5 already exist within the underground duct bank system. If the conduits are intended to be new, provide routing?

Answer: That is correct. Buried Conduits for circuits C9 and A15 exist from PLC-5 to the new TJB (supply and installation of new TJB is part of the proposed project). Refer Item No.1.

Item No. 3:

Question: Spec. Section 40 90 00 generally appears to be from a previous, larger project with an expanded scope. I.e. Paragraph 1.01B.7.a.1 is related to new controls for new Primary Clarifier 2, which isn't part of this project's scope. This project will be using existing signals at PLC-5; therefore no SCADA programming. Please confirm?

Answer:

Volume 2, Specification Section 40 90 00, PART 1 GENERAL, 1.01 Summary B 7. a.1, that read as follows.

“a. Existing PLC, SCADA HMI Modifications General Sequence includes, 1) Addition of new controls for new Primary Clarifier 2 and associated systems (upstream influent gate, Primary scum pump, ground water dewatering, etc.) to existing PLC-06 in CP-06, utilizing existing spare IO points and IO pointes currently” has been removed from the specifications.

Item No. 4: Volume 1, Bid Schedule page. P-3

Question: Please describe what work intended to be covered and paid for under Bid Item 5 - Miscellaneous Work?

Answer: Any unforeseen minor tasks arising during the installation of the bar screen shall be categorized as Miscellaneous Work.

Item No. 5:

Question: Are there any domestic material requirements/Material certification required (Buy America(n), AIS, BABA)?

Answer: There is no Buy America(n), AIS, BABA certification required for this project.

Item No. 6:

Question: Is there any vertical mounting along the sides of the bar screens?

Answer: Yes, there is vertical support along the sides of the bar screen, see attached drawing to this addendum.

Item No. 7:

Question: Will the bar screen be isolated and in a dry state during the duration of the work?

Answer: Yes, bar screen will be isolated by the City staff. Bidder is responsible for pumping the contents to the adjacent channel and cleaning it.

Item No. 8:

Question: When is NTP anticipated for this contract?

Answer: NTP will be issued after the City Council approves the award of the contract.

Item No. 9:

Question: What is the width of the existing bar screen to be removed?

Answer: The width of the existing bar screen is 3 ft.

Item No. 10:


Question: Is the bar screen to be salvaged and stored on site or hauled off and disposed of by the contractor?

Answer: The bar screen needs to be removed, hauled off and disposed of by the contractor.

Item No. 11:

Question: Please elaborate on the extent of the new concrete required for the bar screen recess on 10-D-301. Are we just adding the fillets? Are we adding the anchors? How much concrete is to be added? Can you please provide dimensions?

Answer: As shown below Detail1 on Sheet 10-D-301, Volume 3 Drawings shows existing fillets need to be squared off and then install dowels and fill with concrete. Approximate dimensions of new concrete are 50 inches long, 36 inches wide and 12 inches deep.

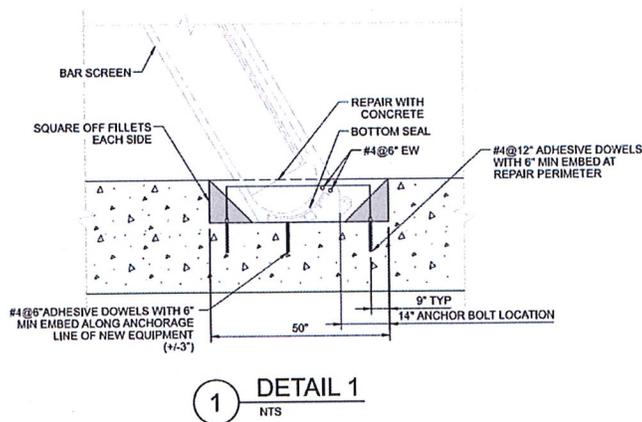

Item No.12:

Question: Is there any concrete demo, chipping, or saw cutting required?

Answer: No concrete demo, chipping or saw cutting is required other than grinding fillets described in Item No.11.

Item No.13:

Question: How close can we access the bar screen with a reach forklift?

Answer: Unlikely to reach the bar screen with a forklift. You will need a crane.

Item No.14:

Question: Is any of the work considered a "confined space"??

Answer: Yes, while entering the channel the confined space entry permit may be required.

Item No.15:

Question: Is a SWPPP plan and implementation required?

Answer: SWPPP plan and implementation is not required for this project.

Item No. 16

As part of City of Tracy's Local Hiring Policy referenced in contract document section 7.1 and in general conditions document section 9.1, Local Hire Good Faith Effort form also needs to be submitted by bidder along with Local Hiring Policy form. City of Tracy Local Hire Good Faith effort form has been attached to this Addendum.

Item No.17:

Question: Addendum 2 includes changes to the bid schedule. Will a revised P-3 Bid Schedule page be issued?

Answer: Revised P-3 Bid Schedule has been attached to this Addendum.

Signed by:

Even G. Marcelo

5116EB02E1424G3...

Even G. Marcelo, PE., City Engineer

Addendum No. 3 is hereby acknowledged by the bidder's signature.

Name of Bidder's Company


Authorized Signature

Date

Title

END OF ADDENDUM NO. 3

REV.	DESCRIPTION	DATE	REVISED	APPROVED

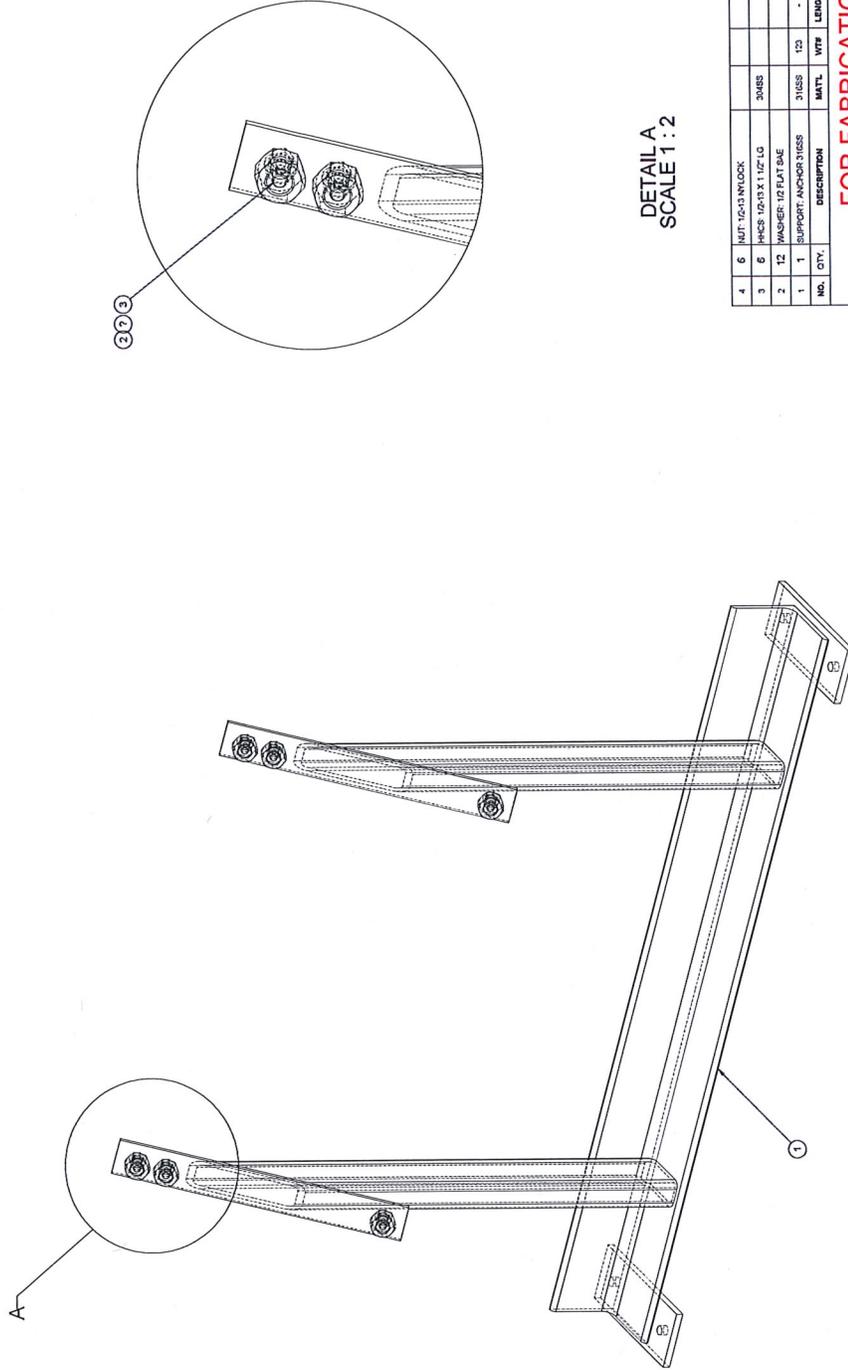

NO.	QTY.	DESCRIPTION	MATL.	WTP	LENGTH	PART NO.
4	6	NUT: 1/2-13 NYLOCK				1213NY.5
3	6	WAS: 1/2-13 X 1 1/2" LG	304SS			12131.9H.5
2	12	WASHER: 1/2" FLAT BASE				12W.6S
1	1	SUPPORT ANCHOR 316SS	316SS	120		3792.S.VRS1.6.0.0

FOR FABRICATION

DUPERON
 3792 S. VRS 1.6.0.0
 Tracy, CA
 WWTP

DESIGNER	JMH	DATE	2/18/2022
CHECKED		DATE	2/18/2022
APPROVED		DATE	2/18/2022
TITLE	SUB-ASSY: VERTICAL SUPPORT 316SS		
FORM NO.	3792.S.VRS1.6.0.0		
REV.	0		
DATE	T-4		
SHEET	1 OF 1		

PROPRIETARY
 THIS DRAWING IS THE PROPERTY OF DUPERON. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREIN. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF DUPERON.

© 2022 DUPERON. ALL RIGHTS RESERVED. TRACY, CA. 95376-1272

CITY OF TRACY
LOCAL HIRE GOOD FAITH EFFORT FORM

(To be Submitted with sealed bid no later than the date and time of the bid opening.)

Pursuant to Section 2.20.340 of Tracy Municipal Code a contractor submitting a bid to the City for a Public Works contract shall agree to make a good faith effort to hire qualified individuals who are Local Residents in sufficient numbers so that (with respect to such Public works contract) no less than fifty percent (50%) of the total construction workforce, including any subcontractor workforce, measured in construction work hours, is comprised of Local Residents.

A "good faith effort" means a Contractor will take the following or similar actions to recruit and maintain Local residents as part of the construction workforce:

- Contact local recruitment sources to identify qualified individuals who are Local Residents;
- Advertise for qualified individuals who are local residents in trade papers and at least (1) newspaper of general circulation within the City or the County of San Joaquin, unless time limits imposed under the applicable Public Works contract relative to the commencement and/or completion of work do not permit such advertising;
- With respect to any portion of a Public Works contract to be performed by a Subcontractor, identify Subcontractors whose workforce includes qualified individuals who are local residents; and
- Develop a written plan to recruit Local Residents as part of the construction workforce.

"Local Resident" means, an individual who is legally domiciled in the City of Tracy and surrounding areas immediately preceding the date of the notice of solicitation or bid advertisement by the City. An individual's domicile is his or her one and only true, fixed and permanent home and principal establishment. An individual shall verify his or her domicile upon request of the contractor or City by producing satisfactory documentation such as a rent/lease agreement, utility bills, a valid state-issued driver's license or identification card, or any other similar and reliable evidence.

Residents from the following ZIP codes are considered to be a Local Resident:

95376, 95377, 95391, 95304, 95330, 95206, 95234, 95231, 95203, 95202, 95204, and 95205.

I, _____ [name], certify under penalty of perjury under the laws of the State of California, that I am the Contractor's _____ [position] and that I have made good faith effort to hire Local Residents and to ascertain facts to the representations made herein. and shall submit this certification with its sealed bid no later than the date and time of the bid opening.

In making this certification, I acknowledge the requirements of **Tracy Municipal Code §§ 2.20.330, 2.20.340, and 2.20.350** and am aware of Section 12650 et seq. of the Government Code providing for imposition of treble damages for making false claims. The City may require the Contractor to provide additional documents and Contractor agrees to comply with any requests made by the City.

Signature

Date

Exclusions and Exceptions

- A. When a state or federal law or regulation applicable to a particular public works contract prohibits a local hiring requirement;
- B. When the City determines (by the City Manager or her/his designee), in accordance with the requirements of this code or applicable state law, that a contract is necessary to respond to an emergency which endangers the public health, safety or welfare; or
- C. When the City determines (by the City Manager or her/his designee) that a suitable pool of qualified individuals who are Local Residents does not exist for a specific Public works contract.

Bid Schedule

This Bid Schedule must be completed in ink and must be included with the sealed Bid Proposal. Pricing must be provided for each Bid Item as indicated. Items marked "(SW)" are Specialty Work that must be performed by a qualified Subcontractor. The lump sum or unit cost for each item must be inclusive of all costs, whether direct or indirect, including profit and overhead. The sum of all amounts entered in the "Extended Total Amount" column must be identical to the Base Bid price entered in Section 1 of the Bid Proposal Form.

AL = Allowance CF = Cubic Feet SY = Square Yard EA = Each LB = Pounds
 LF = Linear Foot LS = Lump Sum SF = Square Feet TON = Ton (2000 lbs)

BID ITEM NO.	ITEM DESCRIPTION	EST. QTY.	UNIT	UNIT COST	EXTENDED TOTAL AMOUNT
1	Mobilization	1	LS		
2	Removal and Demolition of Existing Bar Screen no.1, complete package	1	LS		
3	New Bar Screen Package	1	LS		
4	Installation of New Bar Screen Package	1	LS		
5	Miscellaneous work	1	LS		
6	Demobilization	1	LS		

TOTAL BASE BID: Items 1 through _____ inclusive: \$ _____

[Note: The amount entered as the "Total Base Bid" should be identical to the Base Bid amount entered in Section 1 of the Bid Proposal form.]

BIDDER NAME: _____

END OF BID SCHEDULE